

Application Note


Twin K4u Cascade for Controlling 7 PCs

030

Overview

The connection diagram below shows how you would cascade two K4u switches to allow a user to control 7 PCs.

Connection Diagram

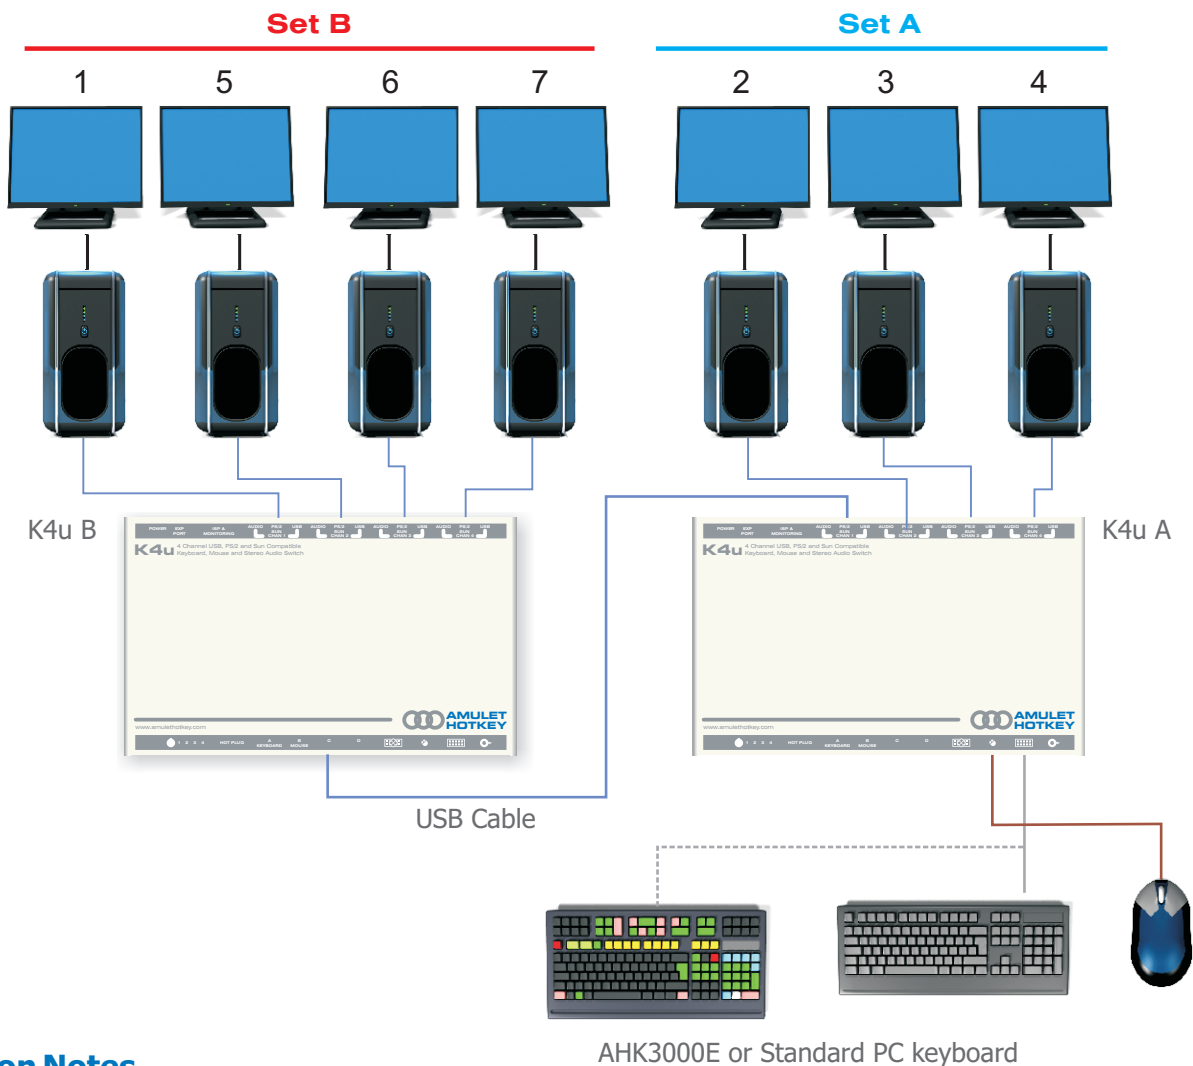

Connection Notes

- A USB cable must be used to join between channel 1 of K4u A and the front of K4u B, port A, B, C or D.
- Mouse channel changing should be disabled on both K4u switches.
- PCs 1 to 7 can be any combination of USB, PS/2™ and legacy Sun™.
- If used, an AHK3000E keyboard must have Cn202 applied; this provides a macro set for controlling the K4u switches and key caps for single key PC selection.
- The hot-keys for K4u A must be Alt-Space and the hot-keys for K4u B must be Caps Lock-Alt.
- The numbering of the PCs is fixed and cannot be changed.

Note that Mouse Point[®] cannot be used in this configuration.

Information in this document is subject to change. No part of this document may be reproduced through any means including (but not limited to) electronic or mechanical, without express written permission from Amulet Hotkey Ltd. Amulet Hotkey Ltd may have patents, patent applications, trademarks or copyrights or other intellectual property rights covering subject matter in this document. Other product names and company names listed within this document may be trademarks of their respective owners. © Amulet Hotkey Ltd. All rights reserved.